

GREEN LINE

INDUSTRIAL SPEED SENSORS

TABLE OF CONTENTS

VR - electromagnetic speed sensors
Digital electromagnetic speed sensors
VR sensors for explosive atmospheres
- EX ATEX Zone 1 / EX NA Class 1 Div 1
- EX ATEX Zone 2 / EX NA Class 1 Div 2
Differential Hall effect speed sensors
Dual Hall effect speed sensors
Zero speed Hall effect speed sensors
Tachometer T400 series
Handheld tachometer series
JAQUET corporate overview

Industrial speed sensors and tachometers

The GreenLine family is the newest line of industrial speed sensors and control modules from JAQUET TECHNOLOGY GROUP. These sensors and tachometers provide solutions for speed sensing and control applications both for end users and small OEM's. Our offering of 50 plus sensors and 4 tachometer modules allows straight forward signal detection, monitoring and conditioning.























Sensors are available with VR or Hall technologies with cable or connector interfaces. Sizes range from 3/8-24 and M10X1 to 3/4-16 and M16X1.5. Sensor capability ranges from zero speed to high frequency detection and all units have sealed sensing areas to prevent liquid intrusion. Also available are direction sensing units and hazardous location versions for both North America (NEC, CEC) and Europe (ATEX).

The JAQUET T400 series F-DC tachometers are available with current or voltage analog output and they also provide a sine to square wave converter/re-transmit signal, sensor health monitoring and a high/low limit relay. All inputs and outputs are galvanically isolated. T400's are configured via a PC with supplied software using the PC-T400 cable. Available packages include DIN-rail mount and panel mount with display.

The new GreenLine sensors and tachometers can be used to provide either a complete measurement chain solution or individual speed sensing products as needed. Technical product overviews follow in this brochure, while complete data sheets are available on www.jaquet.com under the GreenLine sensors link.


VR ELECTROMAGNETIC SPEED SENSORS

- **Temperature rating:** -40...125°C • **Signal output:** Frequency and amplitude proportional to speed
- **Frequency range:** up to 20 kHz • **Electrical:** Sine wave output, 850 Ohm, 135 mH
- **Module / DP Range:** M: 0.5 or larger / DP: 50 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	E12A	Threaded M12x1 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	E12S	Threaded M12x1 stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	E16A	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	E16A25	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 84 mm Thread length: 64 mm
	E16A40	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 122 mm Thread length: 102 mm
	E16AM	Threaded M16x1.5 stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm
	E16AM25	Threaded M16x1.5 stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 92 mm Thread length: 64 mm
	E16AM40	Threaded M16x1.5 stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 130 mm Thread length: 102 mm
	E16S	Threaded M16x1.5 stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	E16S25	Threaded M16x1.5 stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 83 mm Thread length: 64 mm
	E16S40	Threaded M16x1.5 stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 121 mm Thread length: 102 mm
	E38A	Threaded 3/8"- 24 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 48 mm Thread length: 34 mm
	E38S	Threaded 3/8"- 24 UNF stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 54 mm Thread length: 34 mm
	E58A	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	E58A25	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 84 mm Thread length: 64 mm
	E58A40	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 121 mm Thread length: 102 mm
	E58AM	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm
	E58AM25	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 92 mm Thread length: 64 mm
	E58AM40	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 130 mm Thread length: 102 mm
	E58S	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	E58S25	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 83 mm Thread length: 64 mm
	E58S40	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1m 0.34 mm ² , AWG 22	Overall length: 121 mm Thread length: 102 mm







VR ELECTROMAGNETIC SPEED SENSORS

- **Temperature rating:** -40...200°C • **Signal output:** Frequency and amplitude proportional to speed
- **Frequency range:** up to 20 kHz • **Electrical:** Sine wave output, 850 Ohm, 135 mH
- **Module / DP Range:** M: 0.5 or larger / DP: 50 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	E58HAM	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm






DIGITAL ELECTROMAGNETIC SPEED SENSORS

- **Temperature rating:** -40...125°C • **Signal output:** Frequency proportional to speed • **Frequency range:** up to 20 kHz
- **Supply Voltage:** 5...32 VDC • **Electrical:** Square wave, NPN with 2.2 kOhm pull up
- **Module / DP Range:** M: 0.5 or larger / DP: 50 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	EV58AM	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm
	EV58AM25	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 92 mm Thread length: 64 mm
	EV58AM40	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 130 mm Thread length: 102 mm
	EV58S	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	EV58S25	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 83 mm Thread length: 64 mm
	EV58S40	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 121 mm Thread length: 102 mm













VR ELECTROMAGNETIC SPEED SENSORS - EX ATEX Zone 1 / EX NA Class 1 Div 1

- **Temperature rating:** -40...125°C • **Signal output:** Frequency and amplitude proportional to speed
- **Frequency range:** up to 20 kHz • **Electrical:** Sine wave output, 250 Ohm, 70 mH coil
- **Module / DP Range:** M: 1.0 or larger / DP: 25 or coarser **CERTIFIED FOR USE IN EXPLOSIVE ATMOSPHERES**

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	EX58H	Threaded 5/8"- 18 UNF stainless steel IP67	1/2 - 14 NPT Cable PTFE, 3 m	Overall length: 88 mm Thread length: 48 mm
	EX58H35	Threaded 5/8"- 18 UNF stainless steel IP67	1/2 - 14 NPT Cable PTFE, 3 m	Overall length: 129 mm Thread length: 89mm
	EX58H85	Threaded 5/8"- 18 UNF stainless steel IP67	1/2 - 14 NPT Cable PTFE, 3 m	Overall length: 256 mm Thread length: 216 mm
	EX34H	Threaded 3/4"- 20 UNF stainless steel IP67	1/2 - 14 NPT Cable PTFE, 3 m	Overall length: 88 mm Thread length: 48 mm
	EX34H35	Threaded 3/4"- 20 UNF stainless steel IP67	1/2 - 14 NPT Cable PTFE, 3 m	Overall length: 120 mm Thread length: 89 mm



VR ELECTROMAGNETIC SPEED SENSORS - EX ATEX Zone 2/ EX NA Class 1 Div 2

- **Temperature rating:** -40...125°C • **Signal output:** Frequency and amplitude proportional to speed
- **Frequency range:** up to 20 kHz • **Electrical:** Sine wave output, 850 Ohm, 135 mH
- **Module / DP Range:** M: 0.5 or larger / DP: 50 or coarser **CERTIFIED FOR USE IN EXPLOSIVE ATMOSPHERES**

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	EX10A	Threaded M10x1 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 48 mm Thread length: 34 mm
	EX10S	Threaded M10x1 stainless steel IP67	Cable, PTFE, 3m 0.21 mm², AWG 24	Overall length: 54 mm Thread length: 34 mm
	EX12A	Threaded M12x1 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	EX12A35	Threaded M12x1 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 109 mm Thread length: 89 mm
	EX38A	Threaded 3/8"- 24 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 48 mm Thread length: 34 mm
	EX38S	Threaded 3/8"- 24 UNF stainless steel IP67	Cable, PTFE, 3m 0.21 mm², AWG 24	Overall length: 54 mm Thread length: 34 mm
	EX58AM	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm
	EX58AM25	Threaded 5/8"- 24 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 92 mm Thread length: 64 mm
	EX58AM40	Threaded 5/8"- 24 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 130 mm Thread length: 102 mm
	EX58S	Threaded 5/8"- 24 UNF stainless steel IP67	Cable, PTFE, 3 m, 0.21 mm², AWG 24	Overall length: 69 mm Thread length: 50 mm
	EX58S25	Threaded 5/8"- 24 UNF stainless steel IP67	Cable, PTFE, 3 m, 0.21 mm², AWG 24	Overall length: 83 mm Thread length: 64 mm
	EX58S40	Threaded 5/8"- 24 UNF stainless steel IP67	Cable, PTFE, 3 m, 0.21 mm², AWG 24	Overall length: 121 mm Thread length: 102 mm


DIFFERENTIAL HALL EFFECT SPEED SENSORS

- **Temperature rating:** -40...125°C • **Signal output:** Frequency proportional to speed
- **Frequency range:** 5 Hz to 20 kHz • **Supply Voltage:** 8...32 VDC
- **Electrical:** Square wave push-pull output • **Module / DP Range:** M: 0.5 or larger / DP: 50 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	D12A	Smooth 10.8 mm OD flange mount IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Shaft length: 25.7 mm
	D12P	Threaded M12x1 stainless steel IP67	Cu cable insulation PTFE, 0.35 m, 0.21 mm ² , AWG 24 with connector 3 pin AMP	Overall length: 69 mm Thread length: 50 mm









DUAL CHANNEL HALL EFFECT SPEED AND DIRECTION SENSORS

- **Temperature rating:** -40...125°C • **Signal output:** Frequency proportional to speed (channel 1) and direction (ch 2)
- **Frequency range:** 0 Hz to 15 kHz • **Supply Voltage:** 8...32 VDC
- **Electrical:** Square wave output, NPN plus direction line • **Module / DP Range:** M: 1.0 or larger / DP: 25 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	Y12AD	Threaded M12x1 with O-ring and locator key	Connector, M12x1, 4 pin, sealed	Overall length: 75 mm Shaft length: 36 mm










ZERO SPEED HALL EFFECT SPEED SENSORS

- **Temperature rating:** -40...125°C • **Signal output:** Frequency proportional to speed
- **Frequency range:** 0 Hz to 15 kHz • **Supply Voltage:** 8...25 VDC
- **Electrical:** Square wave, NPN with 2.7 Ohm pull up • **Module / DP Range:** M: 1.0 or larger / DP: 25 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	F12A	Threaded M12x1 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	F12S	Threaded M12x1 stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	F16A	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60mm Thread length: 40mm
	F16A25	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 84 mm Thread length: 64 mm
	F16A40	Threaded M16x1.5 stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 121 mm Thread length: 102 mm
	F16S	Threaded M16x1.5 stainless steel IP67	Cable, Silicone, 1m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	F16S25	Threaded M16x1.5 stainless steel IP67	Cable, Silicone, 1m 0.34 mm ² , AWG 22	Overall length: 83 mm Thread length: 64 mm
	F16S40	Threaded M16x1.5 stainless steel IP67	Cable, Silicone, 1m 0.34 mm ² , AWG 22	Overall length: 121 mm Thread length: 102 mm

ZERO SPEED HALL EFFECT SPEED SENSORS - continued


- **Temperature rating:** -40...125°C • **Signal output:** Frequency proportional to speed
- **Frequency range:** 0 Hz to 15 kHz • **Supply Voltage:** 8...25 VDC
- **Electrical:** Square wave, NPN with 2.7 Ohm pull up • **Module / DP Range:** M: 1.0 or larger / DP: 25 or coarser

PICTURE	TYPE	HOUSING	CONNECTION	MECHANICAL
	F58A	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 60 mm Thread length: 40 mm
	F58A25	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 84 mm Thread length: 64 mm
	F58A40	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, M12x1, 4 pin, sealed	Overall length: 121 mm Thread length: 102 mm
	F58AM	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 2 pin	Overall length: 61 mm Thread length: 33 mm
	F58AM25	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 3 pin	Overall length: 92 mm Thread length: 64 mm
	F58AM40	Threaded 5/8"- 18 UNF stainless steel IP67	Connector, MS 3102A-10SL-4P, 3 pin	Overall length: 130 mm Thread length: 102 mm
	F58S	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 69 mm Thread length: 50 mm
	F58S25	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 83 mm Thread length: 60 mm
	F58S40	Threaded 5/8"- 18 UNF stainless steel IP67	Cable, silicone, 1 m 0.34 mm ² , AWG 22	Overall length: 121 mm Thread length: 102 mm

MATING CABLE ASSEMBLY for all sensors with M12x1 connector



- **Material:** PU (poly-urethane) • **Length:** 2 m • **Color:** Green • **Temperature rating:** -20...85°C
- **Connector:** M12 standard, overmoulded. Pin 1 = brown, Pin 2 = white, Pin 3 = blue, Pin 4 = black



- **Material:** PTFE • **Length:** 6.5 m • **Color:** White • **Temperature rating:** Cable -40...260°C / Connector -30...90°C
- **Connector:** M12 standard, overmoulded. Pin 1 = red, Pin 2 = black, Pin 3 = brown, Pin 4 = yellow

Complete measurement chain by JAQUET

JAQUET speed sensors - OEM or customized



JAQUET speed sensors are designed to endure the most demanding ambient conditions and are used in a multitude of applications e.g. turbochargers, hydraulic motors, diesel and gas engines, turbines, pumps and compressors, just to name a few. Our platform approach enables us to take an appropriate sensing technology and package it in either one of our huge array of existing housings or in something matched to your specific requirements.

Need a high temperature helicopter turbine sensor or a railway traction control sensor that delivers tooth frequency x 16 from the first tooth? Consider it done! We are ready for the next challenge.

JAQUET pole wheels and pole bands



JAQUET pole wheels and pole bands represent the highest quality of target technology and complement the chain of speed measurement. Please refer to the pole wheels and pole bands brochure for further information.

JAQUET systems





From hydro electric power stations high in the Pyrenees to nuclear submarines at the bottom of the ocean, JAQUET tachometer products are in service providing optimum solutions for measurement, control and that all important machine protection function.

Find more information about the JAQUET T400 family in the following chapter of this brochure.

JAQUET Handheld tachometers



To complete our speed measurement portfolio - JAQUET also offers handheld tachometers. For more information about these products, please take a look at the last section of this brochure.

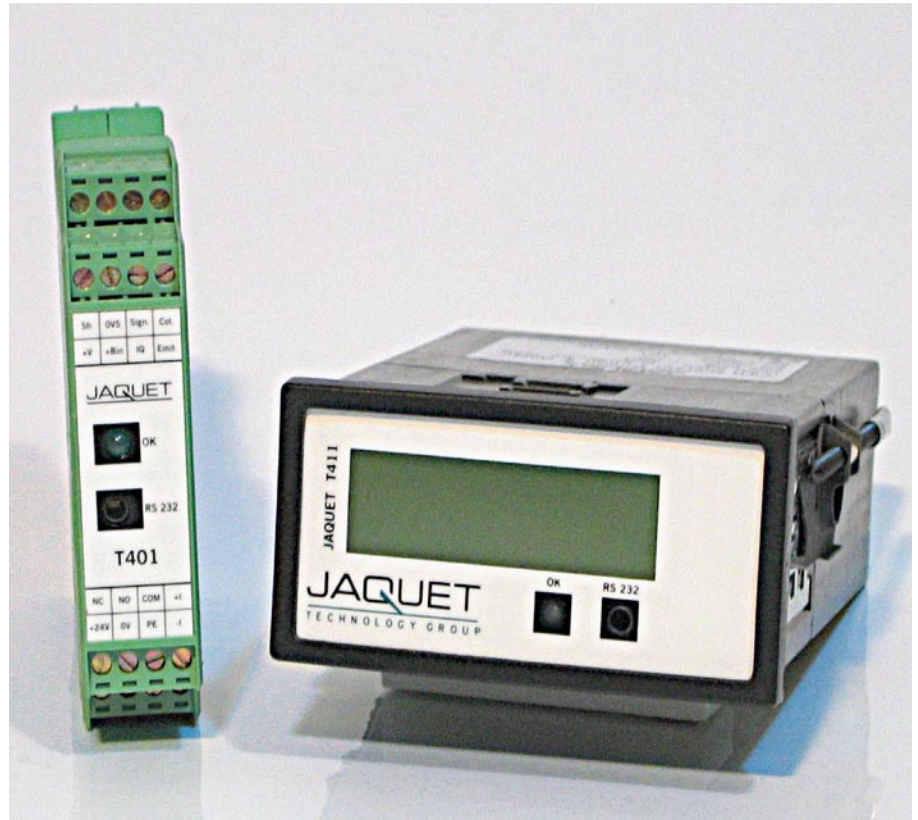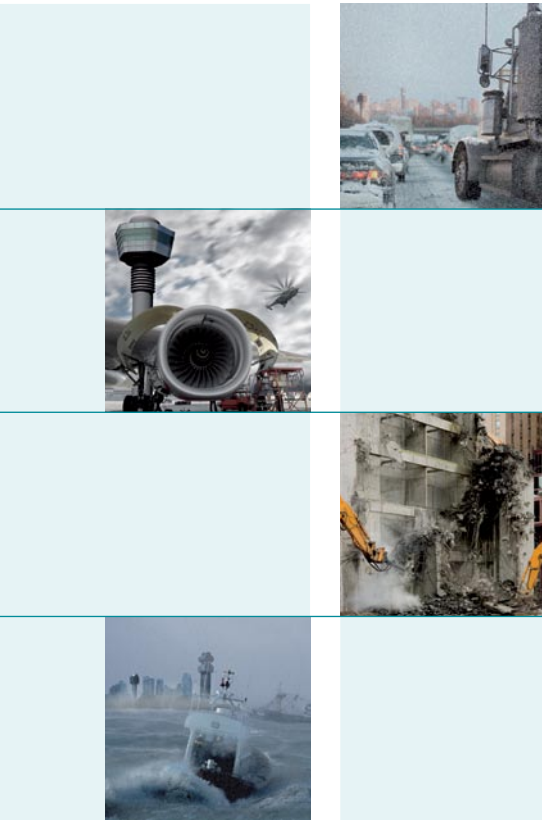

JAQUET T400 Speed measurement, switching and indicating instruments

TYPICAL APPLICATIONS

Diesel engine start control and overspeed protection

Micro turbine measurement and protection
Turbocharger speed measurement

Machine protection in safety critical applications

Universal speed measurement and indication

Features

- Converts absolute speed into an analog signal
- Including 2 limits (A/B) with programmable hysteresis
- One changeover relay assigned via binary input to limit (A or B)
- T411 and T412 models with display
- Isolated signal input with automatic trigger level adjustment
- Built in isolated sensor supply with sensor monitoring
- Open collector output of sensor frequency
- Accuracy class 0.05% for limits and 0.5% for analog signals
- Configuration and status via Windows® software
- 5 digit machine factor allowing configuration and display in machine units
- Wide tolerance 10...36 VDC power supply

T400 advantage

- Fast response to over speed conditions
- Germanischer Lloyd's and ABS approval for marine applications
- Digital display of speed value for the models T411 and T412
- 0/4...20 mA or 0/2...10 V analog output with rising or falling characteristics
- Adaptive trigger provides high noise immunity e.g. with electromagnetic sensors
- Digital input for direct treatment of frequency signals
- 2 possible relay configuration sets e.g. for start up bridging, controlled via binary inputs
- Pluggable terminals
- Integrated 2 or 3 wire sensor monitoring and system watchdog

One channel tachometer family T400

Type and part numbers	T401.00 4...20mA output	383Z-05307
	T402.00 2...10 V output	383Z-05308
	T411.00 display; 4...20 mA output	383Z-05318
	T412.00 display; 2...10 V output	383Z-05319
	T411.03 display; 5 VDC sensor supply; 4...20 mA output	383Z-05595
	T412.03 display; 5 VDC sensor supply; 2...10 V output	383Z-05596
Optional accessories	Power supply 100-240 VAC / 24 VDC / 1 A	383Z-05764
	Interface cable RS232 for configuration	830A-36889
	USB adapter for interface cable	830A-37598

Technical data

Measuring range	Lowest: 0...1.000 Hz Highest: 0...35.00 kHz
Measurement time	Configurable min. measurement time (t_M): 2/5/10/20/50/100/200/500 ms, 1/2/5 s
Reaction time	Current output: Typical $t_M + 7.5$ ms Maximum Input period + $t_M + 7.5$ ms Relays: Typical $t_\phi + 10.5$ ms Maximum Input period + $t_M + 10.5$ ms
Accuracy	0.5% referred to the analog output end of range value
Analog output (1)	T401/T411: Current output 0...20 mA resp. 4...20 mA T402/T412: Voltage output 0...10 V resp. 2...10 V Programmable rising or falling transfer function (min. end value 1.00 Hz) Load T401/T411: max. 500 Ohms corresponding to a maximum of 10 V Load T402/T412: min. 7 kOhm corresponding to a maximum of 1.4 mA Maximum open circuit voltage: 12 V Resolution: 12 bit corresponding to 1:4096 Maximum linearity error: 0.1 % Temperature drift: typ. ± 100 ppm/degree K, max. ± 300 ppm/degree K
Set points /relay (2)	Hysteresis: For each limit an upper and a lower set point may be set independently Change over contact: max. 250 VAC, 1250 VA (DC: see operating instructions)
Data I/O	RS232 interface with +5 V-CMOS level 3-pole. 3.5 mm stereo headphone connector on the front side.
Sensor input (1)	
Input resistance	Analog 30 kOhm / Digital 46 kOhm
Frequency range	0.01 Hz / 35 kHz
Trigger level	Analog input: Adaptive trigger level from 28 mV to 6.5 V or 250 mV to 6.5 V peak depending on the amplitude of the input signal. Digital input: Digital fixed trigger at 3 V \pm 1.5 V hysteresis
Sensor supply	
Standard	+ 14 V, max. 35 mA, short-circuit proof
S5 version	+ 5 V, max. 35 mA, short-circuit proof Built-in pull up and pull down resistor 820 Ohm for connection of two-wire transmitters or daisy chaining of T400's
Sensor monitoring	Sensor monitoring 3 wire sensors: programmable current consumption limits of 0.5...35mA. Outside the selected range the sensor is signaled as faulty. Electromagnetic sensors: Continuity checked. Open circuit signaled as a fault. None: Both sensor monitoring functions may be disabled.
Open collector output (1)	Galvanically separated output of sensor frequency

Binary inputs (1)

For external selection between two sets (A/B) of programmable relay control and acknowledge functions: (No external pull up needed)

Low active :U < +1.5V High (open) :U > +3.5V

Environmental

KUE according to DIN 40 040

Operating temperature: - 40...+85 °C

Storage temperature: -40...+90 °C

Relative humidity up to 75% average over one year period, up to 90% max. for 30 days

Power supply

10...36 VDC power consumption max. 3 W

Insulation

Galvanic separation between power supply, current output and the sensor power supply.

Isolation 700 VDC / 500 VAC. Relay contact isolation: 1500 AC

EMC

Electromagnetic compatibility: Radiation in accordance with international standards and EN 50081-2. Immunity in accordance with international standards and EN 50082-2

Conducted emissions: CISPR 16-1, 16-2

Radiated emissions: EN 55011

Electrostatic discharge: IEC 61000-4-2

Electromagnetic fields: IEC 61000-4-3

Conducted fast transients: IEC 61000-4-4

Conducted slow transients: IEC 61000-4-5

Conducted high frequency: IEC 61000-4-6

Pulse modul. elec. field: ENV 50140


Power frequency magnetic field: IEC 1000-4-8

Standards


EN 50155, GL / Germanischer Lloyd, ABS

Dimensions

T401/402

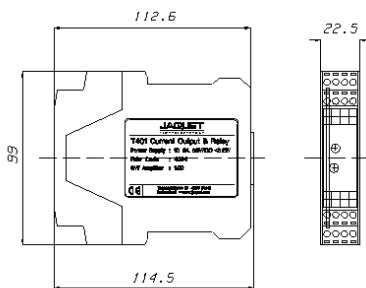

T411/412

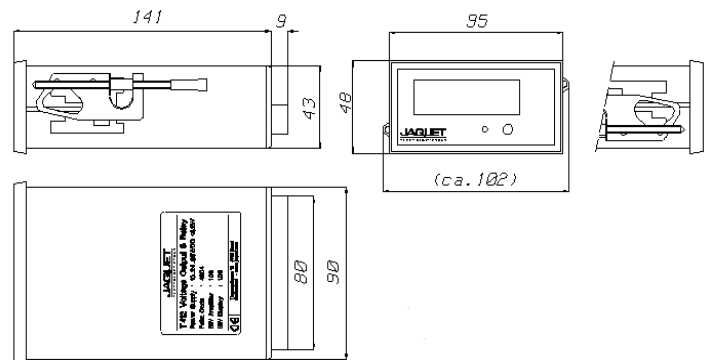

Rail

Rail DIN 4622713 (EN 50022) or mounting plate to DIN 43660 (46121)

Housing

Protection class IP40, terminals IP20

Terminals

Pluggable

Weight

T401/T402: 150 g, T411/T412: 210 g


T400 systems are supplied with a full documentation and the T400 Windows® Software.

The software allows:

- Quick and easy configuration of all operating parameters
- Unit interrogation of identity and parameters
- PC display of current measurement and relay status
- Archiving and printing of the configuration

RS-232 cable not included, see page 2 for optional accessories.

Please note: Information is subject to change. For more technical information please refer to operating instructions.

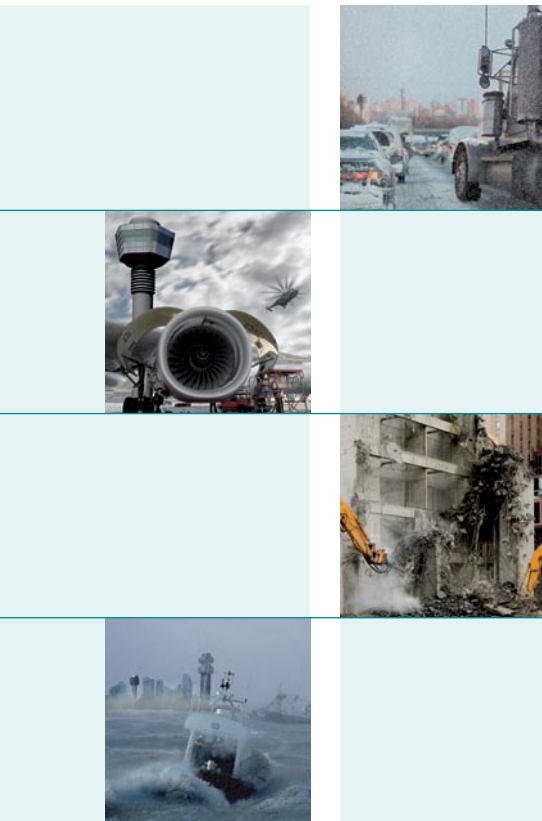

JAQUET Handheld tachometers - HO 100, HM 100 and HC 100

TYPE AND PRODUCT NUMBERS

OPTICAL HAND TACHOMETER

Type number: HO 100

Product number: 372Z-05668

CONTACT HAND TACHOMETER

Type number: HM 100

Product number: 372Z-05669

COMBINATION SET

Type number: HC 100

Product number: 372Z-05670

JAQUET HO 100 Optical Tachometer uses precision optics and reflective tape to measure the RPM of rotating devices such as fans and gears.

JAQUET HM 100 Contact Tachometer uses convex and concave attachments to measure RPM. It also has a built-in wheel to measure the linear surface speed of moving devices such as conveyors and treadmills.

General specifications

Display	5-digit LCD display
Range selection	Automatic range selection
Time base	4 MHz quartz crystal
Sampling time	1 second (> 60 rpm); > 1 second (10 to 60 rpm)
Photo tachometer distance	2 to 12" (5 to 30 cm)
Operating temperature	0...50 °C (32...122 °F)
Operating humidity	80% RH max.
Power supply	9 V battery
Battery life	40 hours (approx.)
Applicable standards	HO 100: EN 50081-1/1992 (EN 55022) HM 100: EN 50082-1/1997 (EN 55024)
Dimensions	HO 100: 124 x 51 x 33 mm HM 100: 150 x 51 x 33 mm
Weight	HO 100: 114 g / HM 100: 142 g

Range specifications

Measurement	Range	Accuracy
Rotation - HO 100 Optical	10.000 to 99999 rpm	± (0.1% reading + 2 digits)
Rotation - HM 100 Contact	10.000 to 9999 rpm	± (0.1% reading + 2 digits)
Surface Speed - HM 100 Contact	1.0000 to 1999.9 m/min	± (1.5% reading + 2digits)

JAUQUET TECHNOLOGY GROUP offers the world's most versatile and advanced range of solutions for the detection, measurement, diagnosis and management of rotational speed.

Our industry and application specific expertise ensures that you will achieve an optimum solution. Completely matched to your individual requirements, meeting key industrial standards and certifications, our products help boost the performance of your machinery while reducing cost of ownership.

TYPICAL INDUSTRIES SERVED

- Automotive and truck
- Aerospace
- Diesel / Gas engines
- Hydraulics
- Railway
- Turbines
- Turbochargers
- Industrial machinery

PRODUCTS – SPEED SENSORS

- Various technologies
- Standard, custom and OEM models
- For demanding applications, e.g. 300,000 rpm, temperature up to 320 °C / 600 °F, high vibration, shock to 200 g, etc.
- GreenLine speed sensors for general applications
- Ex models for hazardous areas
- Pole bands and target wheels available where needed

PRODUCTS – SYSTEMS

- Multi-channel overspeed protection systems
- 1–2 channel measurement, protection and control modules
- Engine diagnostic systems
- Redundant speed measurement and indication

SPECIAL PROJECT EXAMPLES

- An automotive linear movement sensor
- Integrated power and torque measurement for display and gearbox control
- Naval spec. turbine protection for nuclear submarines
- Speed measurement in turreted, tracked vehicles

QUALITY MANAGEMENT AND STANDARDS

- Quality management: TS 16949 & ISO 9001, ZELM ATEX 1020, KWU, EN/AS/JISQ 9100
- Sensors: GL, KWU, TÜV, ATEX, EN 50155, NF F 16-101 102, ABS, EMC
- Systems: IEC 61508 SIL 2 and SIL 3, API 670, GL, TÜV, KWU, EX
- Environmental: RoHS - EU directive 2002/95/EC

JAUQUET – YOUR PARTNER

- Efficient and professional service - JAUQUET TECHNOLOGY GROUP is headquartered in Basel, Switzerland and has subsidiaries in Belgium, China, Germany, the Netherlands, United Kingdom and United States along with a worldwide distributor and end-user service network.
- Flexible production quantities; from 1 to millions per project
- Reduction of total costs by intelligent and cost-effective solutions
- Fast turn around time

